



# National Committee on Uniform Traffic Control Devices

13236 North 7th Street, Suite 4-259, Phoenix, Arizona 85022  
Phone/Text: 231-4-NCUTCD (231-462-8823)  
E-mail: secretary@ncutcd.org Website: <https://ncutcd.org>

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14

## National Committee on Uniform Traffic Control Devices (NCUTCD) Recommended Changes to Proposed Text for 11<sup>th</sup> Edition of the MUTCD Docket Number: FHWA-2020-0001

6 **Federal Register Item Number:** 499, 500, 501

7 **NPA MUTCD Section Number:** Sections 6L.01 to 6L.08

8 **Legend:** Base text shown in proposal is the NPA “clean” proposed text.

- 9 • [NCUTCD recommendation for text to be added in final rule.](#)
- 10 • ~~NCUTCD recommendation for text to be deleted in final rule.~~
- 11 • [NCUTCD recommendation for text to be moved/relocated in final rule.](#)
- 12 • NPA text that was not previously approved by NCUTCD but is now approved.
- 13 • **Explanatory note: [Note that explains purpose of recommended change.]**

15 The following pages present NCUTCD recommendations for changes to the MUTCD NPA  
16 proposed text, tables, and figures for Chapter 6L. Below is a short summary of the NCUTCD  
17 position for each section of this chapter. A more detailed summary is provided at the beginning  
18 of each section.

- 19 • NPA #499, Section 6L.01: NCUTCD agrees with NPA content (no changes recommended)
- 20 • NPA #N/A, Section 6L.02: Changes recommended based on Council action in spring 2021
- 21 • NPA #500, Section 6L.03: NCUTCD agrees with NPA content (no changes recommended)
- 22 • NPA # N/A, Section 6L.04: NCUTCD agrees with NPA content (no changes recommended)
- 23 • NPA # 501, Section 6L.05: NCUTCD agrees with NPA content (no changes recommended)
- 24 • NPA #N/A, Section 6L.06: NCUTCD agrees with NPA content (no changes recommended)
- 25 • NPA #N/A, Section 6L.07: NCUTCD agrees with NPA content (no changes recommended)
- 26 • NPA #N/A, Section 6L.08: NCUTCD agrees with NPA content (no changes recommended)

---

28  
29  
30

## CHAPTER 6L. OTHER TTC ZONE TRAFFIC CONTROL DEVICES

31 **Section 6L.01 Comments:** NCUTCD agrees with 6L.01 as presented in the NPA.

32  
33

### Section 6L.01 Temporary Traffic Control Signals

34

#### Standard:

35 **Temporary traffic control signals (see Section 4D.10) used to control road user**  
36 **movements through TTC zones and in other TTC situations shall comply with the**  
37 **applicable provisions of Part 4.**

38

#### Support:

39 Temporary traffic control signals are typically used in TTC zones such as temporary haul  
40 road crossings; temporary one-way operations along a one-lane, two-way highway; temporary  
41 one-way operations on bridges, reversible lanes, and intersections.

42 **Standard:**

43 **A temporary traffic control signal that is used to control traffic through a one-lane,**  
44 **two-way section of roadway shall comply with the provisions of Section 4Q.02.**

45 *Guidance:*

46 *Where pedestrian traffic is detoured to a temporary traffic control signal, an accessible*  
47 *pedestrian signal (see Section 4K.01) should be provided for crossing along an alternate route.*

48 *When temporary traffic control signals are used, conflict monitors typical of traditional*  
49 *traffic control signal operations should be used.*

50 *Option:*

51 Temporary traffic control signals may be portable or temporarily mounted on fixed supports.

52 *Guidance:*

53 *Temporary traffic control signals should only be used in situations where temporary traffic*  
54 *control signals are preferable to other means of traffic control, such as changing the work*  
55 *staging or work zone size to eliminate one-way vehicular traffic movements, using flaggers to*  
56 *control one-way or crossing movements, using STOP or YIELD signs, and using warning devices*  
57 *alone.*

58 *Support:*

59 Factors related to the design and application of temporary traffic control signals include the  
60 following:

- 61 A. Safety and road user needs;
- 62 B. Work staging and operations;
- 63 C. The feasibility of using other TTC strategies (for example, flaggers, providing space for  
64 two lanes, or detouring road users, including bicyclists and pedestrians);
- 65 D. Sight distance restrictions;
- 66 E. Human factors considerations (for example, lack of driver familiarity with temporary  
67 traffic control signals);
- 68 F. Road-user volumes including roadway and intersection capacity;
- 69 G. Affected side streets and driveways;
- 70 H. Vehicle speeds;
- 71 I. The placement of other TTC devices;
- 72 J. Parking;
- 73 K. Turning restrictions;
- 74 L. Pedestrians;
- 75 M. The nature of adjacent land uses (such as residential or commercial);
- 76 N. Legal authority;
- 77 O. Signal phasing and timing requirements;
- 78 P. Full-time or part-time operation;
- 79 Q. Actuated, fixed-time, or manual operation;
- 80 R. Power failures or other emergencies;
- 81 S. Inspection and maintenance needs;
- 82 T. Need for detailed placement, timing, and operation records; and
- 83 U. Operation by contractors or by others.

84 Although temporary traffic control signals can be mounted on trailers or lightweight portable  
85 supports, fixed supports offer superior resistance to displacement or damage by severe weather,  
86 vehicle impact, and vandalism.

87 *Guidance:*

88 *Other TTC devices should be used to supplement temporary traffic control signals, including*  
89 *warning and regulatory signs, pavement markings, and channelizing devices.*

90 *Temporary traffic control signals not in use should be covered or removed.*

91 *If a temporary traffic control signal is located within 1/2 mile of an adjacent traffic control*  
92 *signal, consideration should be given to interconnected operation.*

93 **Standard:**

94 **Temporary traffic control signals shall not be located within 200 feet of a grade crossing**  
95 **unless the temporary traffic control signal is provided with preemption in accordance with**  
96 **Section 4F.18, or unless a uniformed officer or flagger is provided at the crossing to**  
97 **prevent vehicles from stopping within the crossing.**

---

100 **Section 6L.02 Comments:** NCUTCD generally agrees with 6L.02, but recommends adding a  
101 reference to the new proposed Section 1D.13.

102  
103 **Section 6L.02 Automated Flagger Assistance Devices – General**

104 **Support:**

105 Automated Flagger Assistance Devices (AFADs) enable a flagger(s) to be positioned out of  
106 the lane of traffic and are used to control road users through temporary traffic control zones.  
107 These devices are designed to be remotely operated either by a single flagger at one end of the  
108 TTC zone or at a central location, or by separate flaggers near each device's location.

109 There are two types of AFADs:

110 A. An AFAD (see Section 6L.03) that uses a remotely controlled STOP/SLOW sign on  
111 either a trailer or a movable cart system to alternately control right-of-way.

112 B. An AFAD (see Section 6L.04) that uses remotely controlled red and yellow lenses and a  
113 gate arm to alternately control right-of-way.

114 AFADs might be appropriate for short-term and intermediate-term activities (see Section  
115 6N.01). Typical applications include TTC activities such as, but not limited to:

116 A. Bridge maintenance;

117 B. Haul road crossings; and

118 C. Pavement patching.

119 **Standard:**

120 **AFADs shall only be used in situations where there is only one lane of approaching**  
121 **traffic in the direction to be controlled.**

122 **When used at night, the AFAD location shall be illuminated in accordance with Section**  
123 **6D.06.**

124 *Guidance:*

125 *AFADs should not be used for long-term stationary work (see Section 6N.01).*

126 **Standard:**

127 **Because AFADs are not traffic control signals, they shall not be used as a substitute for**  
128 **or a replacement for a continuously operating temporary traffic control signal as described**  
129 **in Section 6L.01.**

130 **AFADs shall meet the crashworthy ([See Section 6D.13](#)) performance criteria contained**  
131 **in Section 6A.04. [add reference]**

132 *Guidance:*

133 *If used, AFADs should be located in advance of one-lane, two-way tapers and downstream*  
134 *from the point where approaching traffic is to stop in response to the device.*

135 **Standard:**

136 **If used, AFADs shall be placed so that all of the signs and other items controlling traffic**  
137 **movement are readily visible to the driver of the initial approaching vehicle with advance**  
138 **warning signs alerting other approaching traffic to be prepared to stop.**

139 **If used, an AFAD shall be operated only by a flagger (see Section 6D.01) who has been**  
140 **trained on the operation of the AFAD. The flagger(s) operating the AFAD(s) shall not**  
141 **leave the AFAD(s) unattended at any time while the AFAD(s) is being used.**

142 **The use of AFADs shall conform to one of the following methods:**

143 **A. An AFAD at each end of the TTC zone (Method 1), or**

144 **B. An AFAD at one end of the TTC zone and a flagger at the opposite end (Method 2).**

145 **Except as provided in Paragraph 14, two flaggers shall be used when using either**  
146 **Method 1 or Method 2.**

147 **Option:**

148 *A single flagger may simultaneously operate two AFADs (Method 1) or may operate a single*  
149 *AFAD on one end of the TTC zone while being the flagger at the opposite end of the TTC zone*  
150 *(Method 2) if both of the following conditions are present:*

151 *A. The flagger has an unobstructed view of the AFAD(s), and*

152 *B. The flagger has an unobstructed view of approaching traffic in both directions.*

153 **Guidance:**

154 *When an AFAD is used, the advance warning signing should include a ROAD WORK*  
155 *AHEAD (W20-1) sign, a ONE LANE ROAD (W20-4) sign, and a BE PREPARED TO STOP*  
156 *(W3-4) sign.*

157 **Standard:**

158 **When the AFAD is not in use, the signs associated with the AFAD, both at the AFAD**  
159 **location and in advance, shall be removed or covered.**

160 **Guidance:**

161 *A State or local agency that elects to use AFADs should adopt a policy, based on engineering*  
162 *judgment, governing AFAD applications. The policy should also consider more detailed and/or*  
163 *more restrictive requirements for AFAD use, such as the following:*

164 *A. Conditions applicable for the use of Method 1 and Method 2 AFAD operation,*

165 *B. Volume criteria,*

166 *C. Maximum distance between AFADs,*

167 *D. Conflicting lenses/indications monitoring requirements,*

168 *E. Fail safe procedures,*

169 *F. Additional signing and pavement markings,*

170 *G. Application consistency,*

171 *H. Larger signs or lenses to increase visibility, and*

172 *I. Use of backplates.*

---

174 **Section 6L.03 Comments:** NCUTCD agrees with 6L.03 as presented in the NPA.

177 **Section 6L.03 STOP/SLOW Automated Flagger Assistance Devices**

178 **Standard:**

179 A STOP/SLOW Automated Flagger Assistance Device (AFAD) shall include a  
180 STOP/SLOW sign that alternately displays the STOP (R1-1) face and the SLOW (W20-8)  
181 face of a STOP/SLOW paddle (see Figure 6L-1).

182 The AFAD's STOP/SLOW sign shall have an octagonal shape, shall be fabricated of  
183 rigid material, and shall be mounted with the bottom of the sign a minimum of 6 feet above  
184 the pavement on an appropriate support. The size of the STOP/SLOW sign shall be at  
185 least 24 x 24 inches with letters at least 8 inches high. The background of the STOP face  
186 shall be red with white letters and border. The background of the SLOW face shall be  
187 diamond shaped and orange with black letters and border. Both faces of the STOP/SLOW  
188 sign shall be retroreflectorized.

189 The AFAD's STOP/SLOW sign shall have a means to positively lock, engage, or  
190 otherwise maintain the sign assembly in a stable condition when set in the STOP or SLOW  
191 position.

192 The AFAD's STOP/SLOW sign shall be supplemented with active conspicuity devices  
193 by incorporating either:

- 194 A. White or red flashing lights within the STOP face and white or yellow flashing lights  
195 within the SLOW face meeting the provisions contained in Section 6D.02; or  
196 B. A Stop Beacon (see Section 4S.05) mounted a maximum of 24 inches above the  
197 STOP face and a Warning Beacon (see Section 4S.03) mounted a maximum of 24  
198 inches above, below, or to the side of the SLOW face. The Stop Beacon shall not be  
199 flashed or illuminated when the SLOW face is displayed, and the Warning Beacon  
200 shall not be flashed or illuminated when the STOP face is displayed. Except for the  
201 mounting locations, the beacons shall comply with the provisions of Chapter 4S.

202 Option:

203 Type B warning light(s) (see Section 6L.07) or strobe lights may be used in lieu of the  
204 Warning Beacon during the display of the SLOW face of the AFAD's STOP/SLOW sign.

205 **Standard:**

206 If Type B warning lights or strobe lights are used in lieu of a Warning Beacon, they  
207 shall flash continuously when the SLOW face is displayed and shall not be flashed or  
208 illuminated when the STOP face is displayed.

209 Option:

210 The faces of the AFAD's STOP/SLOW sign may include louvers to improve the stability of  
211 the device in windy or other adverse environmental conditions.

212 **Standard:**

213 If louvers are used, the louvers shall be designed such that the full sign face is visible to  
214 approaching traffic at a distance of 50 feet or greater.

215 *Guidance:*

216 The STOP/SLOW AFAD should include a gate arm that descends to a down position across  
217 the approach lane of traffic when the STOP face is displayed and then ascends to an upright  
218 position when the SLOW face is displayed.

219 Option:

220 In lieu of a stationary STOP/SLOW sign with a separate gate arm, the STOP/SLOW sign  
221 may be attached to a mast arm that physically blocks the approach lane of traffic when the STOP  
222 face is displayed and then moves to a position that does not block the approach lane when the  
223 SLOW face is displayed.

224 **Standard:**

225 Gate arms, if used, shall be fully retroreflectorized on both sides, and shall have vertical  
226 alternating red and white stripes at 16-inch intervals measured horizontally as shown in  
227 Figure 8D-1. When the arm is in the down position blocking the approach lane:

- 228 A. The minimum vertical aspect of the arm and sheeting shall be 2 inches; and
- 229 B. The end of the arm shall reach at least to the center of the lane being controlled.

230 A WAIT ON STOP (R1-7) sign (see Figure 6L-1) shall be displayed to road users  
231 approaching the AFAD.

232 Option:

233 A GO ON SLOW (R1-8) sign (see Figure 6L-1) may also be displayed to road users  
234 approaching the AFAD.

235 The WAIT ON STOP/ GO ON SLOW (R1-7a) sign (see Figure 6L-1) may also be used to  
236 display both messages to approaching road users.

237 **Standard:**


238 The GO ON SLOW sign, if used, and the WAIT ON STOP sign shall be positioned on  
239 the same support structure as the AFAD or immediately adjacent to the AFAD such that  
240 they are in the same direct line of view of approaching traffic as the sign faces of the  
241 AFAD.

242 To inform road users to stop, the AFAD shall display the STOP face and the red or  
243 white lights, if used, within the STOP face shall flash or the Stop Beacon shall flash. To  
244 inform road users to proceed, the AFAD shall display the SLOW face and the yellow or  
245 white lights, if used, within the SLOW face shall flash or the Warning Beacon or the Type  
246 B warning lights shall flash.

247 If STOP/SLOW AFADs are used to control traffic in a one-lane, two-way TTC zone,  
248 safeguards shall be incorporated to prevent the flagger(s) from simultaneously displaying  
249 the SLOW face at each end of the TTC zone. Additionally, the flagger(s) shall not display  
250 the AFAD's SLOW face until all oncoming vehicles have cleared the one-lane portion of the  
251 TTC zone.  
252

253  
254

**Figure 6L-1 Comments: NCUTCD agrees with Figure 6L-1 as presented in the NPA.**

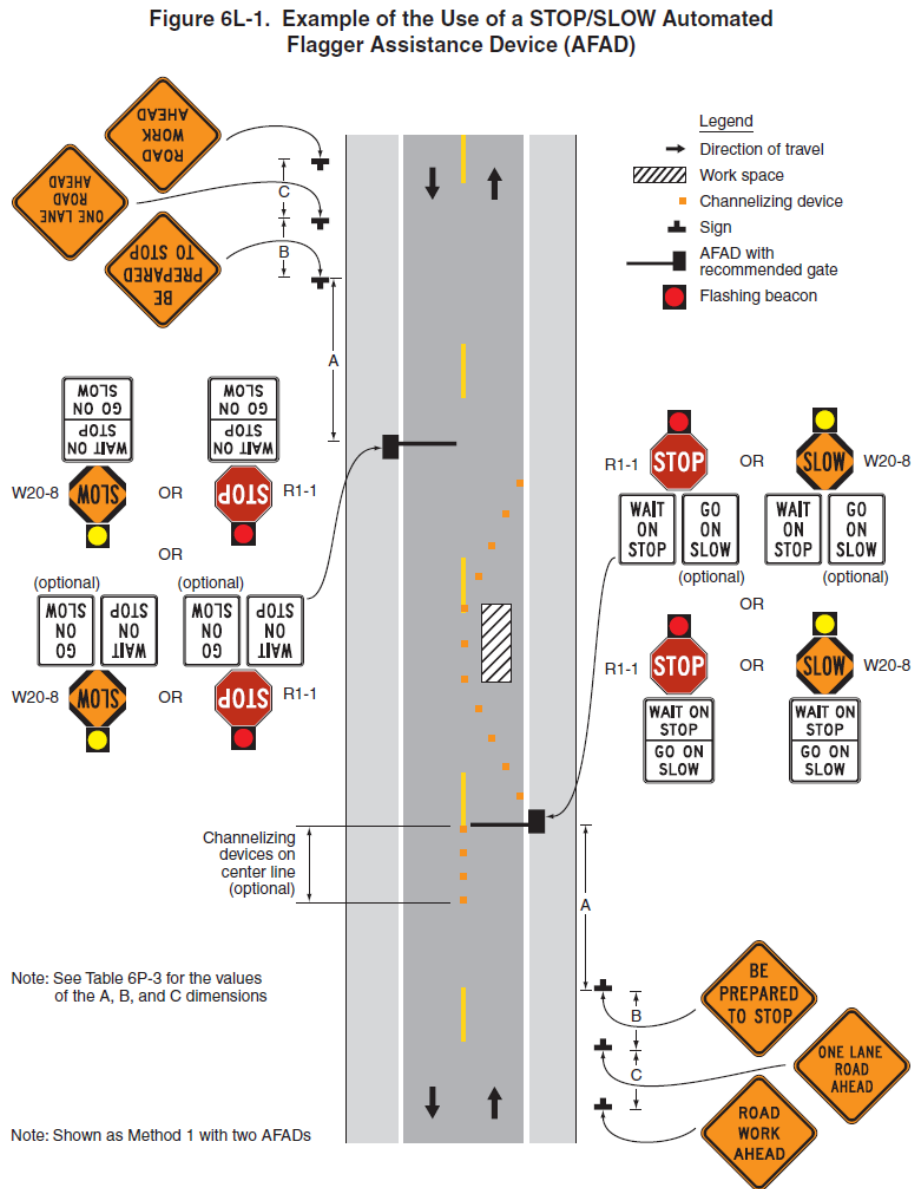

255  
256

**Section 6L.04 Comments: NCUTCD agrees with 6L.04 as presented in the NPA.**

257

258

259

260

261

262

263

264

**Section 6L.04 Red/Yellow Lens Automated Flagger Assistance Devices Standard:**

A Red/Yellow Lens Automated Flagger Assistance Device (AFAD) shall alternately display a steadily illuminated CIRCULAR RED lens and a flashing CIRCULAR YELLOW lens to control traffic without the need for a flagger in the immediate vicinity of the AFAD or on the roadway (see Figure 6L-2).



265 **Red/Yellow Lens AFADs shall have at least one set of CIRCULAR RED and**  
266 **CIRCULAR YELLOW lenses that are 12 inches in diameter. Unless otherwise provided in**  
267 **this Section, the lenses and their arrangement, CIRCULAR RED on top and CIRCULAR**  
268 **YELLOW below, shall comply with the applicable provisions for traffic signal indications**  
269 **in Part 4. If the set of lenses is post-mounted, the bottom of the housing (including**  
270 **brackets) shall be at least 7 feet above the pavement. If the set of lenses is located over any**  
271 **portion of the highway that can be used by motor vehicles, the bottom of the housing**  
272 **(including brackets) shall be at least 15 feet above the pavement.**

273 **Option:**

274 Additional sets of CIRCULAR RED and CIRCULAR YELLOW lenses, located over the  
275 roadway or on the left-hand side of the approach and operated in unison with the primary set,  
276 may be used to improve visibility and/or conspicuity of the AFAD.

277 **Standard:**

278 **A Red/Yellow Lens AFAD shall include a gate arm that descends to a down position**  
279 **across the approach lane of traffic when the steady CIRCULAR RED lens is illuminated**  
280 **and then ascends to an upright position when the flashing CIRCULAR YELLOW lens is**  
281 **illuminated. The gate arm shall be fully retroreflectorized on both sides, and shall have**  
282 **vertical alternating red and white stripes at 16-inch intervals measured horizontally as**  
283 **shown in Figure 8D-1. When the arm is in the down position blocking the approach lane:**

284 **A. The minimum vertical aspect of the arm and sheeting shall be 2 inches; and**

285 **B. The end of the arm shall reach at least to the center of the lane being controlled.**

286 **A Stop Here On Red (R10-6 or R10-6a) sign (see Section 2B.63) shall be installed on the**  
287 **right-hand side of the approach at the point at which drivers are expected to stop when the**  
288 **steady CIRCULAR RED lens is illuminated (see Figure 6L-2).**

289 **To inform road users to stop, the AFAD shall display a steadily illuminated**  
290 **CIRCULAR RED lens and the gate arm shall be in the down position. To inform road**  
291 **users to proceed, the AFAD shall display a flashing CIRCULAR YELLOW lens and the**  
292 **gate arm shall be in the upright position.**

293 **If Red/Yellow Lens AFADs are used to control traffic in a one-lane, two-way TTC zone,**  
294 **safeguards shall be incorporated to prevent the flagger(s) from actuating a simultaneous**  
295 **display of a flashing CIRCULAR YELLOW lens at each end of the TTC zone.**

296 **Additionally, the flagger shall not actuate the AFAD's display of the flashing CIRCULAR**  
297 **YELLOW lens until all oncoming vehicles have cleared the one-lane portion of the TTC**  
298 **zone.**

299 **A change interval shall be provided as the transition between the display of the flashing**  
300 **CIRCULAR YELLOW indication and the display of the steady CIRCULAR RED**  
301 **indication. During the change interval, the CIRCULAR YELLOW lens shall be steadily**  
302 **illuminated. The gate arm shall remain in the upright position during the display of the**  
303 **steadily illuminated CIRCULAR YELLOW change interval.**

304 **A change interval shall not be provided between the display of the steady CIRCULAR**  
305 **RED indication and the display of the flashing CIRCULAR YELLOW indication.**

306 *Guidance:*


307 *The steadily illuminated CIRCULAR YELLOW change interval should have a duration of at*  
308 *least 5 seconds, unless a different duration, within the range of durations recommended by*  
309 *Section 4F.17, is justified by engineering judgment.*

310



311  
312

**Figure 6L-2 Comments:** NCUTCD agrees with Figure 6L-2 as presented in the NPA.

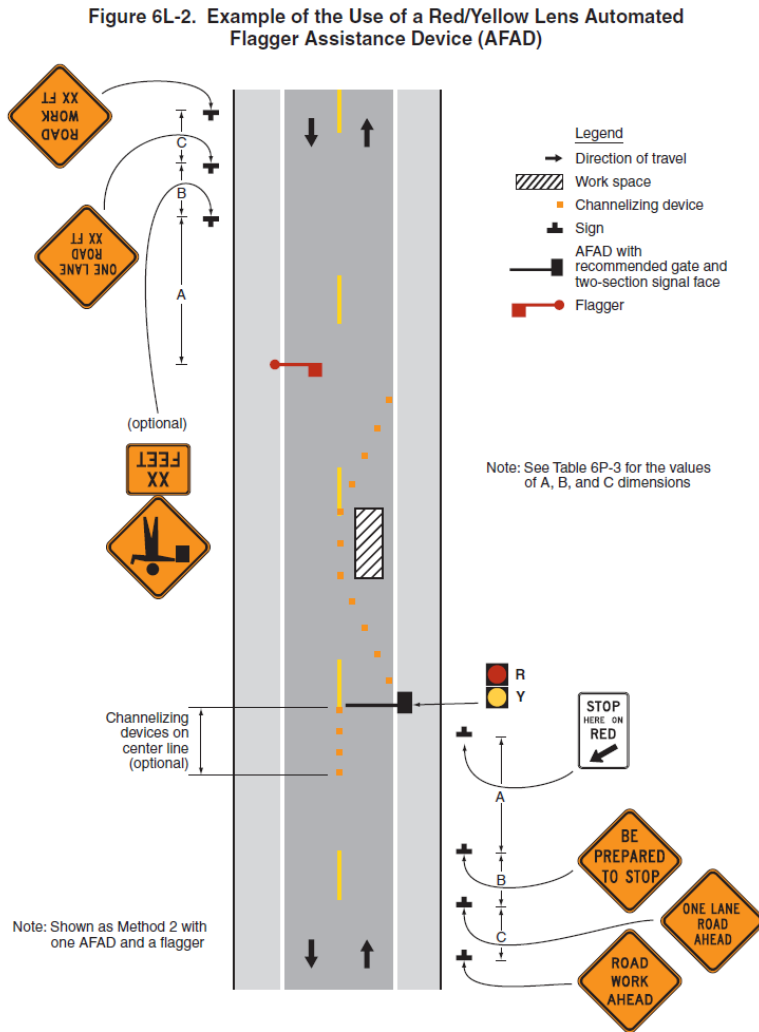

313  
314

**Section 6L.05 Comments:** NCUTCD agrees with 6L.05 as presented in the NPA.

315  
316  
317

**Section 6L.05 Portable Changeable Message Signs**

318 Support:

319  
320 Portable changeable message signs (PCMS) are TTC devices installed for temporary use with  
321 the flexibility to display a variety of messages. In most cases, portable changeable message  
322 signs follow the same provisions for design and application as those given for changeable  
323 message signs in Chapter 2L. The information in this Section describes situations where the  
324 provisions for portable changeable message signs differ from those given in Chapter 2L.

325 Portable changeable message signs are used most frequently on high-density urban freeways,  
326 but have applications on all types of highways where highway alignment, road user routing  
327 problems, or other pertinent conditions require advance warning and information.

328 Portable changeable message signs have a wide variety of applications in TTC zones  
329 including: roadway, lane, or ramp closures; incident management; width restriction information;  
330 speed control or reductions; advisories on work scheduling; road user management and  
331 diversion; warning of adverse conditions or special events; and other operational control.

332 The primary purpose of portable changeable message signs in TTC zones is to advise the  
333 road user of unexpected situations. Portable changeable message signs are particularly useful as  
334 they are capable of:

- 335 A. Conveying complex messages,
- 336 B. Displaying real time information about conditions ahead, and
- 337 C. Providing information to assist road users in making decisions prior to the point where  
338 actions must be taken.

339 Some typical applications include the following:

- 340 A. Where the speed of vehicular traffic is expected to drop substantially;
- 341 B. Where significant queuing and delays are expected;
- 342 C. Where adverse environmental conditions are present;
- 343 D. Where there are changes in alignment or surface conditions;
- 344 E. Where advance notice of ramp, lane, or roadway closures is needed;
- 345 F. Where crash or incident management is needed; and/or
- 346 G. Where changes in the road user pattern occur.

347 *Guidance:*

348 *The components of a portable changeable message sign should include: a message sign,*  
349 *control systems, a power source, and mounting and transporting equipment. The front face of*  
350 *the sign should be covered with a protective material.*

351 **Standard:**

352 **Portable changeable message signs shall comply with the applicable design and**  
353 **application principles established in Chapter 2A. Portable changeable message signs shall**  
354 **display only traffic operational, regulatory, warning, and guidance information, and shall**  
355 **not be used for advertising messages.**

356 Support:

357 Section 2L.02 contains information regarding overly simplistic or vague messages that is also  
358 applicable to portable changeable message signs.

359 **Standard:**

360 **The colors used for legends on portable changeable message signs shall comply with**  
361 **those shown in Table 2A-5.**

362 Support:

363 Section 2L.04 contains information regarding the luminance, luminance contrast, and  
364 contrast orientation that is also applicable to portable changeable message signs.

365 *Guidance:*

366 *Portable changeable message signs should be visible from 1/2 mile under both day and night*  
367 *conditions.*

368 Support:

369 Section 2B.23 contains information regarding the design of portable changeable message  
370 signs that are used to display speed limits that change based on operational conditions, or are  
371 used to display the speed at which approaching drivers are traveling.

372 *Guidance:*

373 *A portable changeable message sign should be limited to three lines of eight characters per*  
374 *line or should consist of a full matrix display.*

375 *Except as provided in Paragraph 15, the letter height used for portable changeable message*  
376 *sign messages should be a minimum of 18 inches.*

377 **Option:**

378 For portable changeable message signs mounted on service patrol trucks or other incident  
379 response vehicles, a letter height as short as 10 inches may be used. Shorter letter sizes may also  
380 be used on a portable changeable message sign used on low speed facilities provided that the  
381 message is legible from at least 650 feet.

382 The portable changeable message sign may vary in size.

383 **Guidance:**

384 *Messages on a portable changeable message sign should consist of no more than two phases,*  
385 *and a phase should consist of no more than three lines of text. Each phase should be capable of*  
386 *being understood by itself, regardless of the order in which it is read. Messages should be*  
387 *centered within each line of legend. If more than one portable changeable message sign is*  
388 *simultaneously legible to road users, then only one of the signs should display a sequential*  
389 *message at any given time.*

390 **Support:**

391 Road users have difficulties in reading messages displayed in more than two phases on a  
392 typical three-line portable changeable message sign.

393 **Standard:**

394 **Except when being used to simulate an Arrow Board display (see Section 6L.06),**  
395 **techniques of message display such as animation, rapid flashing, dissolving, exploding,**  
396 **scrolling, travelling horizontally or vertically across the face of the sign, or other dynamic**  
397 **elements shall not be used.**

398 **Guidance:**

399 *When a message is divided into two phases, the display time for each phase should be at least*  
400 *2 seconds, and the sum of the display times for both of the phases should be a maximum of 8*  
401 *seconds.*

402 *All messages should be designed with consideration given to the principles provided in this*  
403 *Section and also taking into account the following:*

404 *A. The message should be as brief as possible and should contain three thoughts (with each*  
405 *thought preferably shown on its own line) that convey:*

- 406 *1. The problem or situation that the road user will encounter ahead,*
- 407 *2. The location of or distance to the problem or situation, and*
- 408 *3. The recommended driver action.*

409 *B. If more than two phases are needed to display a message, additional portable changeable*  
410 *message signs should be used. When multiple portable changeable message signs are*  
411 *needed, they should be placed on the same side of the roadway and they should be*  
412 *separated from each other by a distance of at least 1,000 feet on freeways and*  
413 *expressways, and by a distance of at least 500 feet on other types of highways.*

414 **Standard:**

415 **When the word messages shown in Tables 1D-1 or 1D-2 need to be abbreviated on a**  
416 **portable changeable message sign, the provisions described in Section 1D.10 shall be**  
417 **followed.**

418 **In order to maintain legibility, portable changeable message signs shall automatically**  
419 **adjust their brightness under varying light conditions.**

420 **The control system shall include a display screen upon which messages can be reviewed**  
421 **before being displayed on the message sign. The control system shall be capable of**  
422 **maintaining memory when power is unavailable.**

423 **Portable changeable message signs shall be equipped with a power source and a battery**  
424 **back-up to provide continuous operation when failure of the primary power source occurs.**

425 **The mounting of portable changeable message signs on a trailer, a large truck, or a**  
426 **service patrol truck shall be such that the bottom of the message sign shall be a minimum**  
427 **of 7 feet above the roadway in urban areas and 5 feet above the roadway in rural areas**  
428 **when it is in the operating mode.**

429 *Guidance:*

430 *Portable changeable message signs should be used as a supplement to and not as a substitute*  
431 *for conventional signs and pavement markings.*

432 *When portable changeable message signs are used for route diversion, they should be placed*  
433 *far enough in advance of the diversion to allow road users ample opportunity to perform*  
434 *necessary lane changes, to adjust their speed, or to exit the affected highway.*

435 *Portable changeable message signs should be sited and aligned to provide maximum*  
436 *legibility and to allow time for road users to respond appropriately to the portable changeable*  
437 *Message sign message.*

438 *Portable changeable message signs should be placed off the shoulder of the roadway and*  
439 *behind a traffic barrier, if practical. Where a traffic barrier is not available to shield the*  
440 *portable changeable message sign, it should be placed off the shoulder and outside of the clear*  
441 *zone. If a portable changeable message sign has to be placed on the shoulder of the roadway or*  
442 *within the clear zone, it should be delineated with retroreflective TTC devices.*

443 *When portable changeable message signs are used in TTC zones, they should display only*  
444 *TTC messages.*

445 *When portable changeable message signs are not being used to display TTC messages, they*  
446 *should be relocated such that they are outside of the clear zone or shielded behind a traffic*  
447 *barrier and turned away from traffic. If relocation or shielding is not practical, they should be*  
448 *delineated with retroreflective TTC devices.*

449 *Portable changeable message sign trailers should be delineated on a permanent basis by*  
450 *affixing retroreflective material, known as conspicuity material, in a continuous line on the face*  
451 *of the trailer as seen by oncoming road users.*

452

453

454 **Section 6L.06 Comments: NCUTCD agrees with 6L.06 as presented in the NPA.**

455

## 456 **Section 6L.06 Arrow Boards**

### 457 **Standard:**

458 **An arrow board shall be a sign with a matrix of elements capable of either flashing or**  
459 **sequential displays. This sign shall provide additional warning and directional information**  
460 **to assist in merging and controlling road users through or around a TTC zone.**

461 *Guidance:*

462 *An arrow board in the arrow or chevron mode should be used to advise approaching traffic*  
463 *of a lane closure along major multi-lane roadways in situations involving heavy traffic volumes,*

464 *high speeds, and/or limited sight distances, or at other locations and under other conditions*  
 465 *where road users are less likely to expect such lane closures.*

466 *If used, an arrow board should be used in combination with appropriate signs, channelizing*  
 467 *devices, or other TTC devices.*

468 *An arrow board should be placed on the shoulder of the roadway or, if practical, farther*  
 469 *from the traveled lane. It should be delineated with retroreflective TTC devices. When an arrow*  
 470 *board is not being used, it should be removed; if not removed, it should be shielded; or if the*  
 471 *previous two options are not feasible, it should be delineated with retroreflective TTC devices.*


472 **Standard:**

473 **Arrow boards shall meet the minimum size, legibility distance, number of elements, and**  
 474 **other specifications shown in Figure 6L-3.**

475  
 476  
 477

**Figure 6L-3 Comments: NCUTCD agrees with Figure 6L-3 as presented in the NPA.**

**Figure 6L-3. Advance Warning Arrow Board Display Specifications**

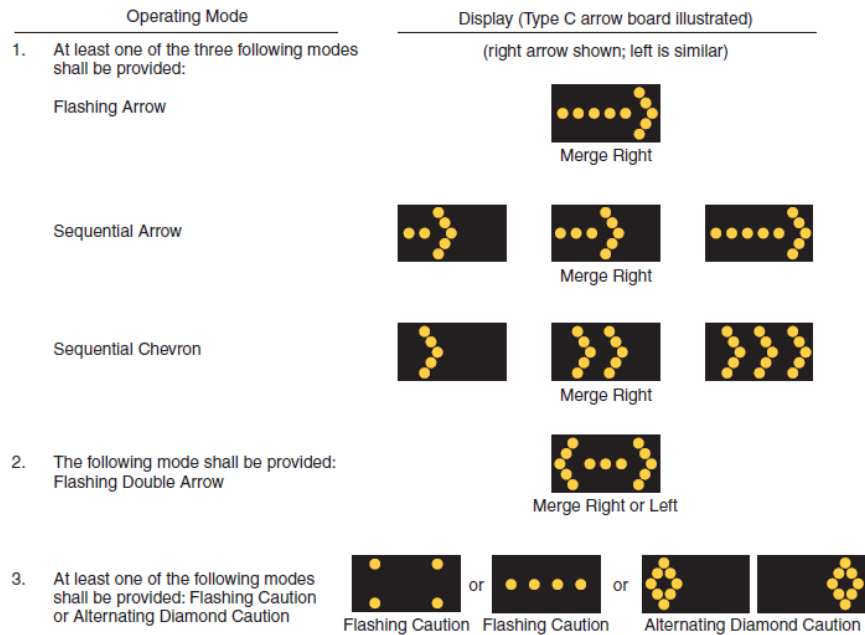

Arrow Board Type	Minimum Size	Minimum Legibility Distance	Minimum Number of Elements
A	48 x 24 inches	1/2 mile	12
B	60 x 30 inches	3/4 mile	13
C	96 x 48 inches	1 mile	15
D	None*	1/2 mile	12

\*Length of arrow equals 48 inches, width of arrowhead equals 24 inches

478

479 Support:

480 Type A arrow boards are appropriate for use on low-speed urban streets. Type B arrow  
481 boards are appropriate for intermediate-speed facilities and for maintenance or mobile operations  
482 on high-speed roadways. Type C arrow boards are intended to be used on high-speed, high-  
483 volume motor vehicle traffic control projects. Type D arrow boards are intended for use on  
484 vehicles authorized by the State or local agency.

485 **Standard:**

486 **Type A, B, and C arrow boards shall have solid rectangular appearances. A Type D**  
487 **arrow board shall conform to the shape of the arrow.**

488 **All arrow boards shall be finished in non-reflective black. The arrow board shall be**  
489 **mounted on a vehicle, a trailer, or other suitable support.**

490 *Guidance:*

491 *The minimum mounting height, measured vertically from the bottom of the board to the*  
492 *roadway below it or to the elevation of the near edge of the roadway, of an arrow board should*  
493 *be 7 feet, except on vehicle-mounted arrow boards, which should be as high as practical.*

494 *A vehicle-mounted arrow board should be provided with remote controls.*

495 **Standard:**

496 **Arrow board elements shall be capable of at least a 50 percent dimming from full**  
497 **brilliance. The dimmed mode shall be used for nighttime operation of arrow boards.**

498 *Guidance:*

499 *Full brilliance should be used for daytime operation of arrow boards.*

500 **Standard:**

501 **The arrow board shall have suitable elements capable of the various operating modes.**  
502 **The color presented by the elements shall be yellow.**

503 *Guidance:*

504 *If an arrow board consisting of a bulb matrix is used, the elements should be recess-mounted*  
505 *or equipped with an upper hood of not less than 180 degrees.*

506 **Standard:**

507 **The minimum element on-time shall be 50 percent for the flashing mode, with equal**  
508 **intervals of 25 percent for each sequential phase. The flashing rate shall be not less than 25**  
509 **or more than 40 flashes per minute.**

510 **An arrow board shall have the following three mode selections:**

511 **A. A Flashing Arrow, Sequential Arrow, or Sequential Chevron mode;**

512 **B. A flashing Double Arrow mode; and**

513 **C. A flashing Caution or Alternating Diamond mode.**

514 **An arrow board in the arrow or chevron mode shall be used only for stationary or**  
515 **moving lane closures on multi-lane roadways.**

516 **For shoulder work, blocking the shoulder, for roadside work near the shoulder, or for**  
517 **temporarily closing one lane on a two-lane, two-way roadway, an arrow board shall be**  
518 **used only in the caution mode.**

519 *Guidance:*

520 *For a stationary lane closure, the arrow board should be located on the shoulder at the*  
521 *beginning of the merging taper.*

522 *Where the shoulder is narrow, the arrow board should be located in the closed lane.*

523 **Standard:**

524 **When arrow boards are used to close multiple lanes, a separate arrow board shall be**  
525 **used for each closed lane.**

526 *Guidance:*

527 *When arrow boards are used to close multiple lanes, if the first arrow board is placed on the*  
528 *shoulder, the second arrow board should be placed in the first closed lane at the upstream end of*  
529 *the second merging taper (see Figure 6P-37). When the first arrow board is placed in the first*  
530 *closed lane, the second arrow board should be placed in the second closed lane at the*  
531 *downstream end of the second merging taper.*

532 *For mobile operations where a lane is closed, the arrow board should be located to provide*  
533 *adequate separation from the work operation to allow for appropriate reaction by approaching*  
534 *drivers.*

535 **Standard:**

536 **A vehicle displaying an arrow board shall be equipped with high-intensity rotating,**  
537 **flashing, oscillating, or strobe lights.**

538 **Arrow boards shall only be used to indicate a lane closure. Arrow boards shall not be**  
539 **used to indicate a lane shift.**

540 *Option:*

541 *A portable changeable message sign may be used to simulate an arrow board display.*  
542

543

544 **Section 6L.07 Comments: NCUTCD agrees with 6L.07 as presented in the NPA.**  
545

#### 546 **Section 6L.07 Flashing Beacons and Warning Lights**

547 *Guidance:*

548 *Lighting devices should be provided in TTC zones based on engineering judgment.*

549 *Option:*

550 *Flashing beacons (see Chapter 4S) and/or warning lights may be used to supplement*  
551 *retroreflectorized signs, barriers, and channelizing devices.*

552 *Support:*

553 *Type A, Type B, Type C, and Type D 360-degree warning lights are portable, powered,*  
554 *yellow, lens-directed, enclosed lights.*

555 **Standard:**

556 **Warning lights shall comply with the provisions in Chapter 13 of the publication**  
557 **entitled, “Equipment and Materials Standards of the Institute of Transportation**  
558 **Engineers” (see Section 1A.05).**

559 **When warning lights are used, they shall be mounted on signs or channelizing devices**  
560 **in a manner that, if hit by an errant vehicle, they will not be likely to penetrate the**  
561 **windshield.**

562 *Guidance:*

563 *The maximum spacing for warning lights should be identical to the channelizing device*  
564 *spacing requirements.*

565 *Support:*

566 *The light weight and portability of warning lights are advantages that make these devices*  
567 *useful as supplements to the retroreflectorization on signs and channelizing devices. The*  
568 *flashing lights are effective in attracting road users' attention.*

569 *Option:*



570 Warning lights may be used in either a steady-burn or flashing mode.

571 **Standard:**

572 **Warning lights shall flash when placed on channelizing devices used alone or in a**  
573 **cluster to warn of a condition.**

574 **Except for the sequential flashing warning lights discussed in Paragraph 12, warning**  
575 **lights placed on channelizing devices used in a series to channelize road users shall be**  
576 **steady-burn.**

577 **Except for the sequential flashing warning lights that are described in Paragraph 12,**  
578 **flashing warning lights shall not be used for delineation, as a series of flashers fails to**  
579 **identify the desired vehicle path.**

580 **If a series of sequential flashing warning lights is used on channelizing devices that**  
581 **form a merging taper, the successive flashing of the lights shall occur from the upstream**  
582 **end of the merging taper to the downstream end of the merging taper in order to identify**  
583 **the desired vehicle path. Each flashing warning light in the sequence shall be flashed at a**  
584 **rate of not less than 55 or more than 75 times per minute.**

585 **Type A Low-Intensity Flashing warning lights, Type C Steady-Burn warning lights,**  
586 **and Type D 360-degree Steady-Burn warning lights shall be maintained so as to be capable**  
587 **of being visible on a clear night from a distance of 3,000 feet. Type B High-Intensity**  
588 **Flashing warning lights shall be maintained so as to be capable of being visible on a sunny**  
589 **day when viewed without the sun directly on or behind the device from a distance of 1,000**  
590 **feet.**

591 **Warning lights shall have a minimum mounting height of 30 inches to the bottom of the**  
592 **lens.**

593 **Support:**

594 **Type A Low-Intensity Flashing warning lights are used to warn road users during nighttime**  
595 **hours that they are approaching or proceeding in a potentially hazardous area.**

596 **Option:**

597 **Type A warning lights may be mounted on channelizing devices.**

598 **Support:**

599 **Type B High-Intensity Flashing warning lights are used to warn road users during both**  
600 **daylight and nighttime hours that they are approaching a potentially hazardous area.**

601 **Option:**

602 **Type B warning lights are designed to operate 24 hours per day and may be mounted on**  
603 **advance warning signs or on independent supports.**

604 **Type C Steady-Burn warning lights and Type D 360-degree Steady-Burn warning lights may**  
605 **be used during nighttime hours to delineate the edge of the traveled way.**

606 **Guidance:**

607 *When used to delineate a curve, Type C and Type D 360-degree warning lights should only*  
608 *be used on devices on the outside of the curve, and not on the inside of the curve.*

609

610

611 **Section 6L.08 Comments: NCUTCD agrees with 6L.08 as presented in the NPA.**

612

613 **Section 6L.08 High-Level Warning Devices (Flag Trees)**

614 **Option:**

615 **A high-level warning device (flag tree) may supplement other TTC devices in TTC zones.**

616 Support:

617 A high-level warning device is designed to be seen over the top of typical passenger cars. A  
618 typical high-level warning device is shown in Figure 6F-1.

619 **Standard:**

620 A high-level warning device shall consist of a minimum of two flags with or without a  
621 Type B high-intensity flashing warning light. The distance from the roadway to the bottom  
622 of the lens of the light and to the lowest point of the flag material shall be not less than 8  
623 feet. The flag shall be 16 inches square or larger and shall be orange or fluorescent red-  
624 orange in color.

625 Option:

626 An appropriate warning sign may be mounted below the flags.

627 Support:

628 High-level warning devices are most commonly used in high-density road user situations to  
629 warn road users of short-term operations.

630