



National Committee on Uniform Traffic Control Devices

13236 North 7th Street, Suite 4-259, Phoenix, Arizona 85022
Phone/Text: 231-4-NCUTCD (231-462-8823)
E-mail: secretary@ncutcd.org Website: https://ncutcd.org

Item No.: 24B-MKG-02

NCUTCD PROPOSAL FOR CHANGES TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES

COMMITTEE / TASK FORCE: Markings Technical Committee
ITEM NUMBER: 24B-MKG-02
TOPIC: Channelizing Devices (Tubular Markers, Vertical Panels, and Lane Separators) for used for Emphasis of Pavement Marking Patterns
ORIGIN OF REQUEST: Channelizing Devices MCTF: James Kratz (Chair), Mike Hare, Gevin McDaniel, Anna Mermelstein, Peter Speer, Gabe Dowell, Lee Austin, Timothy Lang, Scott Zehngraff, Rich Deal
AFFECTED SECTIONS OF MUTCD: 3I.01, 3I.02, 3I.03, 3I.04, 6K.03

DEVELOPMENT HISTORY:

Approved by Markings TC: 06/26/2024
 Approved by TTC: 06/27/2024
 Approved by NCUTCD Council:

This is a proposal for recommended changes to the MUTCD that has been developed by a technical committee or joint task force of the NCUTCD. The NCUTCD is distributing it to its sponsoring organizations for review and comment. Sponsor comments will be considered in revising the proposal prior to NCUTCD Council consideration. This proposal does not represent a revision of the MUTCD and does not constitute official MUTCD standards, guidance, or options. If approved by the NCUTCD Council, the recommended changes will be submitted to FHWA for consideration for inclusion in a future MUTCD revision. The MUTCD can be revised only through the federal rulemaking process.

SUMMARY:

This proposal is to expand the applicable channelizing devices used for permanent conditions within the MUTCD. There is confusion and disagreement within agencies in regard to applicability of the channelizing devices when emphasizing other traffic control devices.

DISCUSSION:

In 2012 and 2019, the MTC submitted recommendations to NCUTCD expanding the channelizing devices used outside of temporary traffic control zones (TTCZ) and ensuring these devices are same color as the pavement markings they supplement. The first NCUTCD recommendation in 2012 added tubular markers as a short-term fix for Chapter 3H of the 2009 MUTCD. The plan was to add additional subsections within Chapter 3H for permanently

32 mounted channelizer devices with emphasis on color, dimensions, placement and reflectivity. In
33 2019, new Sections 3H.03; Vertical Panels, 3H.04; Lane Separators, and 3H.05; Raised Islands
34 used for Emphasis of Pavement Marking Patterns received comments from sponsors.
35 Unfortunately, the proposal was tabled based on the comments and work on the 11th Edition.
36

37 This proposal updates the 2019 submission for the MUTCD 11th Edition, provides updates
38 based on agency practices, and consistency between Chapters 3I and 6K. Additionally, there
39 has been more use of tubular devices, vertical panels, and lane separators by agencies, and
40 they have developed guidance for the devices.
41

42
43 **RECOMMENDED MUTCD CHANGES:**
44 The following present the proposed changes to the current MUTCD within the context of the
45 current MUTCD language. Proposed additions to the MUTCD are shown in blue underline and
46 proposed deletions from the MUTCD are shown in ~~red strikethrough~~. Deletions made by a
47 technical committee or task force after initial distribution to sponsoring organizations are shown
48 in ~~highlighted red strikethrough and Helvetica text~~. Additions made by a technical committee or
49 task force after initial distribution to sponsoring organizations are shown in underline blue and
50 Helvetica text.
51

52
53 **PART 3. MARKINGS**

54
55 **CHAPTER 3I. CHANNELIZING DEVICES USED FOR EMPHASIS OF PAVEMENT**
56 **MARKINGS PATTERNS**
57

58 **Section 3I.01 Channelizing Devices**

59 Option:
60 01 Channelizing devices (see Sections 6K.01 through 6K.07 and Figure 6K-1) such as cones, tubular
61 markers, vertical panels, lane separators, drums, and barricades may be used for general traffic control
62 purposes such as adding emphasis to reversible lane delineation, channelizing lines, islands, pedestrian
63 facilities, or bicycle facilities. Channelizing devices may also be used along a center line to preclude turns
64 or along lane lines to preclude lane changing, as determined by engineering judgment.

65 Support:
66 02 Although they are not considered to be traffic control devices, raised islands (see Chapter 3J) are also
67 sometimes used to channelize traffic.

68 **Standard:**
69 02a Designs of various channelizing devices shall be as shown in Figure 3I-XX. All channelizing
70 devices shall be crashworthy (See definition in Section 1C.02).
71 03 **Except for color, the design of channelizing devices, including but not limited to**
72 **retroreflectivity, minimum dimensions, and mounting height, shall comply with the provisions of**
73 **Chapter 6K.**
74 04 **Except as provided in Paragraph 5, the color of channelizing devices used outside of temporary**
75 **traffic control zones shall be the same color as the pavement marking that they supplement, or for**
76 **which they are substituted, in accordance with Section 3A.03.**

77 Option:

78 05 The color of channelizing devices used to emphasize pavement marking patterns outside of
79 temporary traffic control zones may be orange provided that the application of the orange-colored
80 channelizing device is not permanent.

81 Support:

82 06 Emergency incidents and planned special events are the most common temporary traffic control
83 zones that would justify orange channelizing devices to emphasize standard pavement marking colors.
84 These events do not necessitate police officers or other authorized personnel to obtain and deploy
85 channelizing devices that match the color of the existing pavement marking.

86 **Standard:**

87 07 **For nighttime use, channelizing devices shall be retroreflective (as described in Part 6) or**
88 **internally illuminated. On channelizing devices used outside of temporary traffic control zones,**
89 **retroreflective sheeting or bands shall be white if the devices separate traffic flows in the same**
90 **direction and shall be yellow if the devices separate traffic flows in the opposite direction or are**
91 **placed along the left-hand edge line of a one-way roadway or ramp.**

92

93 **Section 3I.02 Tubular Markers**

94 **Standard:**

95 01 **Tubular markers for permanent installation shall be a minimum of 28 inches in height and**
96 **shall be a minimum of 2 inches wide facing road users.**

97 *Guidance:*

98 02 *Tubular markers should be affixed to the pavement or other surface either directly or by means of an*
99 *attachment system that is affixed to the pavement or other surface. ~~Tubular markers should be normally~~*
100 *spaced no greater than N as cited in Section 3B.14*

101 Option:

102 ~~03—Other spacing may be used based on engineering judgment.~~

103 03A Tubular Marker height may be reduced to accommodate stopping sight distance or other safety
104 concerns as determined by engineering judgment.

105 Support:

106 04 Tubular markers are generally spaced no greater than N as cited in Section 3B.14. Tubular markers
107 are sometimes used to provide additional emphasis or improve lane discipline in advance of an
108 unsignalized crosswalk (see Figure 3I-~~01~~02).

109 *Guidance:*

110 05 *When tubular markers are used to supplement a R1-6 series sign (see Section 2B.20) that is either on*
111 *the center line, lane line, or median island, they should to be used on the same pavement marking line*
112 *where the R1-6 series sign is installed.*

113 Support:

114 06 Section 6K.04 contains information for temporary installations of tubular markers.
115

116 **Section 3I.03 Vertical Panels**

117 **Standard:**

118 01 **Vertical panels shall be a minimum of 36 inches in height and shall be a minimum of 8 inches**
119 **wide facing road users. Vertical panels shall have retroreflective material that is 8 to 12 inches in**
120 **width and at least 24 inches in height.**

121 *Guidance:*

122 02 Vertical panels should be affixed to the pavement or other surface either directly or by means of an
123 attachment system that is affixed to the pavement or other surface. Vertical panels should be spaced 10
124 to 40 feet apart.

125 Option:

126 03 Other spacing may be used based on engineering judgment.

127 Support:

128 04 See Chapters 2B and 2C for information on signs and applicability for use on vertical panels.

129 05 Section 6K.05 contains information for temporary installations of vertical panels.

130

131 **Section 3I.04 Lane Separators**

132 **Standard:**

133 01 **Lane separators shall consist of a longitudinal base component made of preformed material**
134 **with a maximum of 4 inches in height and a maximum of 12 inches in width.**

135 Guidance:

136 02 One or more of types of channelizing devices, such as tubular markers or vertical panels mounted on
137 flexible supports, should be affixed to the longitudinal base.

138 03 Lane Separators should be affixed to the pavement or other surface either directly or by means of an
139 attachment system that is affixed to the pavement or other surface.

140 Support:


141 04 Lane separators are also known as channelizing curb, hardened centerlines, traffic separator, or
142 similar.

143 05 Section 6K.11 contains information for temporary installations of temporary lane separators.

144


145
146

Figure 3I-X. Examples of Channelizing Devices

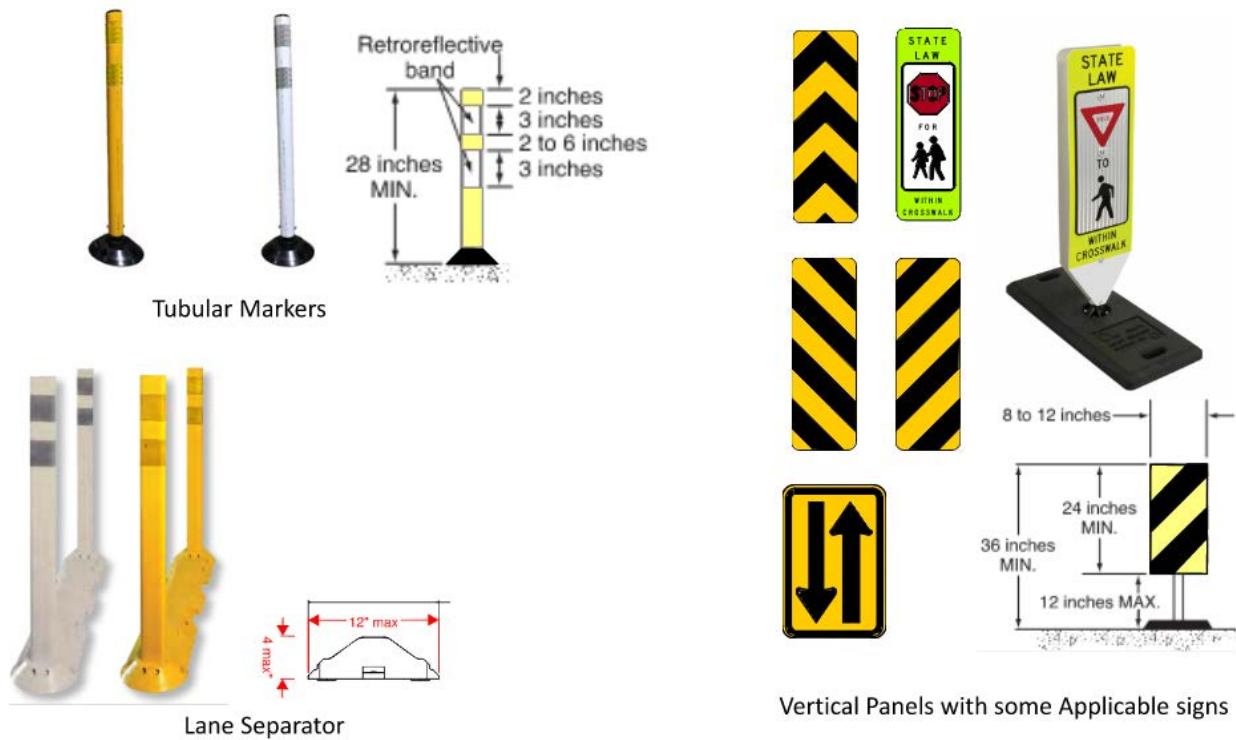


147
148

Figure 3I-2 Examples of Tubular Markers Supplementing Pavement Markings in Advance of an Unsignalized Crosswalk (Sheet 1 of 2)

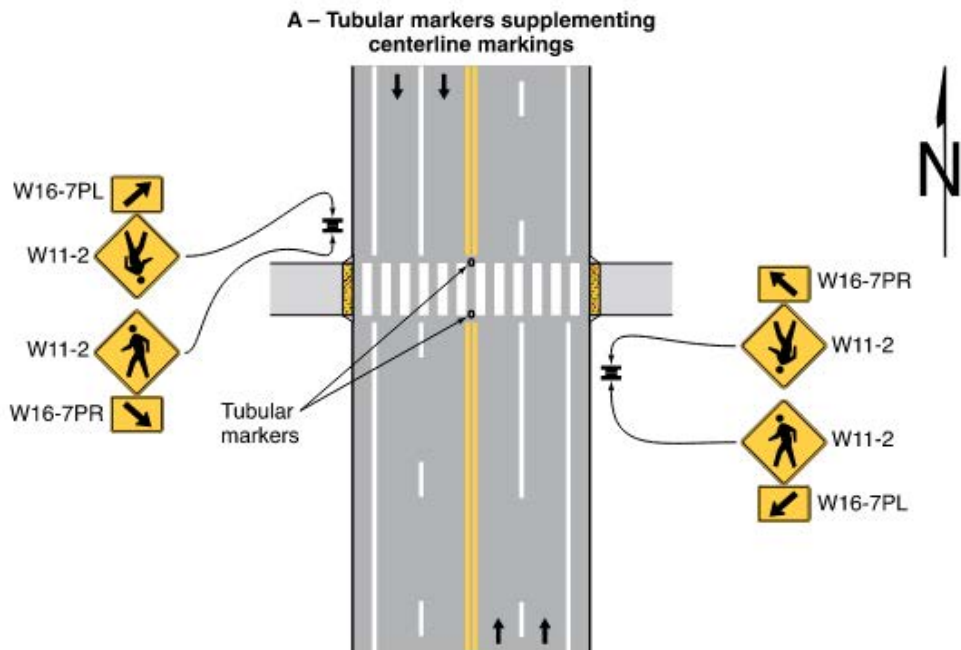

149

Figure 3I-+2 Examples of Tubular Markers Supplementing Pavement Markings in Advance of an Unsignalized Crosswalk (Sheet 2 of 2)

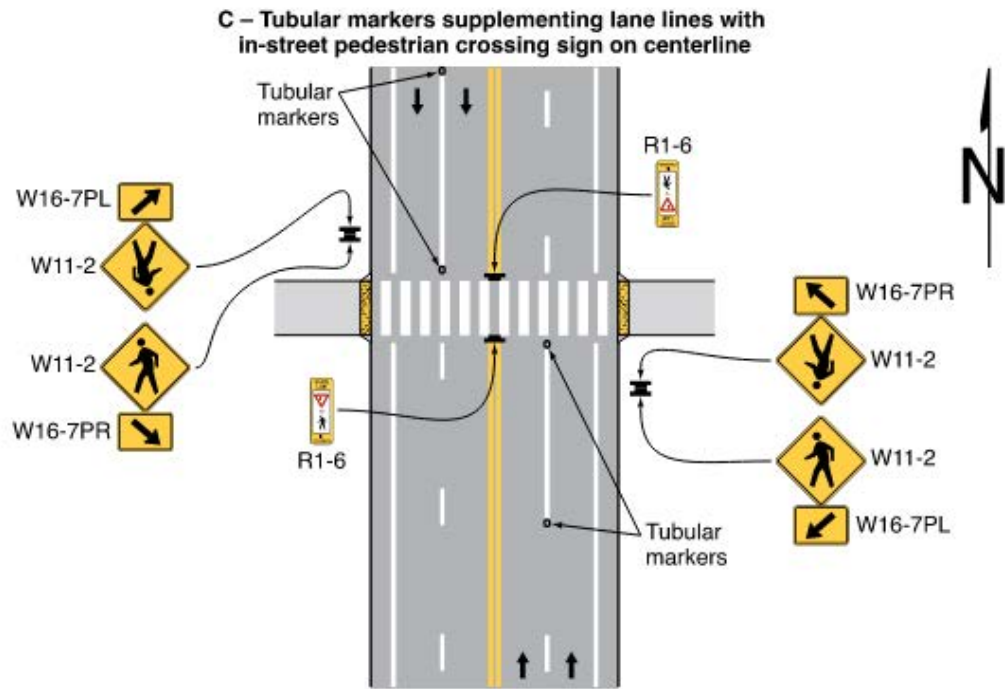

150

151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183

PART 6. MARKINGS

CHAPTER 6K. TTC ZONE CHANNELIZING DEVICES

Section 6K.04 Tubular Markers

Standard:

01 Tubular markers (see Figure 6K-1) shall be predominantly orange for TTC zone applications and shall be not less than 18 inches high and 2 inches wide facing road users. ~~They shall be made of a material that can be struck without causing damage to the impacting vehicle.~~

02 Tubular markers shall be a minimum of 28 inches in height when they are used on freeways and other high-speed highways, on all highways during nighttime, or whenever more conspicuous guidance is needed.

03 For nighttime use, tubular markers shall be retroreflectorized. Retroreflectorization of tubular markers that have a height of less than 42 inches shall be provided by two 3-inch wide white bands placed a maximum of 2 inches from the top with a maximum of 6 inches between the bands. Retroreflectorization of tubular markers that have a height of 42 inches or more shall be provided by four 4- to 6-inch wide alternating orange and white stripes with the top stripe being orange.

Guidance:

04 *Tubular markers have less visible area than other devices and should be used only where space restrictions do not allow for the use of other more visible devices.*

05 *Tubular markers should be stabilized by affixing them to the pavement, by using weighted bases, or weights such as sandbag rings that can be dropped over the tubular markers and onto the base to provide added stability. Ballast should be kept to the minimum amount needed.*

Option:

06 Tubular markers may be used effectively to divide opposing lanes of road users, divide vehicular traffic lanes when two or more lanes of moving vehicular traffic are kept open in the same direction, and to delineate the edge of a pavement drop off where space limitations do not allow the use of larger devices.

Standard:

07 A tubular marker shall be attached to the pavement to display the minimum 2-inch width to the approaching road users.